


# Ribbon Unit For Air-Blown Installation

*Offering a Effective Solution for Fiber Access*

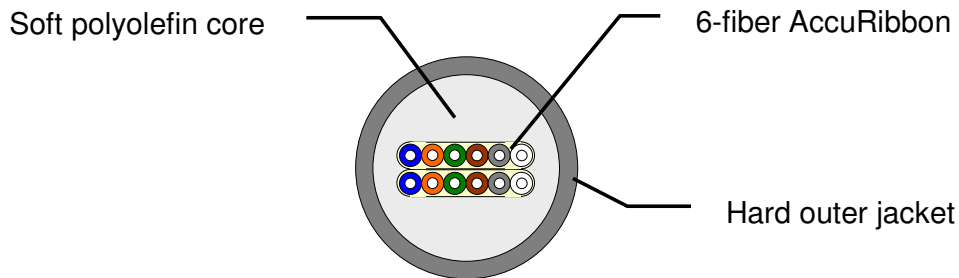

## **Description:**

This Ribbon Unit is designed for air-blown installations into microducts. The core of the product consists of one or two 6-fiber AccuRibbons embedded in a soft plastic. An outer skin or jacket of a tougher plastic completes the unit.

## **Temperature Range:**

Installation:	-15°C to 40°C [-5°F to 104°F]
Operation:	-40°C to 60°C [-40°F to 140°F]
Storage/Shipping:	-40°C to 70°C [-40°F to 158°F]

**Fiber Type:** Available with AllWave<sup>®</sup> fiber (other fiber types available).

## **Attenuation Performance:**

Standard:	0.40 dB/km max. at 1310 nm 0.30 dB/km max. at 1550 nm
Premium:	0.35 dB/km max. at 1310 nm 0.25 dB/km max. at 1550 nm

**Fiber Count:** 6 or 12

## **Physical Characteristics:**

Outer Diameter: 2.6 mm [0.10"]  
Cable Weight: 5.5 kg/km [3.7 lb/kft]